

The KEY for high protection

Keyboard specialist InduKey[®] presents a cost-effective and stylish Stainless Steel Keyboard –
The best reply to the high demands of POI and heavy industrial markets



FI-Kieliversio



InduSteel²[™]

Robust and durable

IP65 sealed (NEMA 4x)

scanmagnetics.com

InduSteel²™ - Technical data

Features and benefits:

- Robust and durable
- Silicone switching elements
- Integrated 38 mm stainless steel trackball available
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Actuation force 1 N / key travel 1.5 mm
- Semi or full customisation available

Specification InduSteel²™

Number of Keys:	68
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. Operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	300 x 125 x 26 mm 11.81 x 4.92 x 1.02"
Weight:	1600 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Cat.-No.	Product Name	
KV03005	TKV-068-MODUL-PS/2-US	PS/2; US-Layout
KV03007	TKV-068-MODUL-USB-US	USB; US-Layout
KY13002	TKY-068-MODUL-GASKET	Gasket

Other language versions/interfaces/configuration available on request

Specification InduSteel²™ with Trackball

Dimensions:	375 x 125 x 33 mm; 14.76 x 4.92" x 1.3"
Weight:	2000 g
Basic Specification:	see above

Specification Trackball

Ball Diameter:	38 mm; 1,5"
Actuation Force:	65 g
Protection Level:	IP65 static; NEMA 3; IP54 dynamic

Cat.-No.	Product Name	
KV03001	TKV-068-TB38V-MODUL-PS/2-US	PS/2; US-Layout
KV03003	TKV-068-TB38V-MODUL-USB-US	USB; US-Layout
KY13003	TKY-068-TB38V-MODUL-GASKET	Gasket

Other language versions/interfaces/configuration available on request

Company stamp

scanmagnetics.com



FI-Kieliversio

TKV-068-TB38V-MODUL



Features and benefits:

- The web-layout version with 38 mm stainless steel trackball
- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- Semi or full customisation available
- Kiosk designed web- and e-mail-hot keys

Specification Keyboard

Number of Keys:	68
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. Operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	375 x 125 x 33 mm; 14.76" x 4.92" x 1.3"
Weight:	2000 g
Operating Temperature:	-40 °C to 90 °C; -40 °F to +194 °F
Frontplate Material:	stainless steel
Voltage:	5 V DC over PC-Port
Power Consumption:	max 50 mA, typ. 18 mA to 27 mA



Specification Trackball

Ball Diameter:	38 mm; 1,5"
Actuation Force:	65 g
Protection Level:	IP65 static; NEMA 3; IP54 dynamic

Cat.-No.	Product Name	
KV03001	TKV-068-TB38V-MODUL-PS/2-US	PS/2; US-Layout
KV03003	TKV-068-TB38V-MODUL-USB-US	USB; US-Layout
KY13003	TKY-068-TB38V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

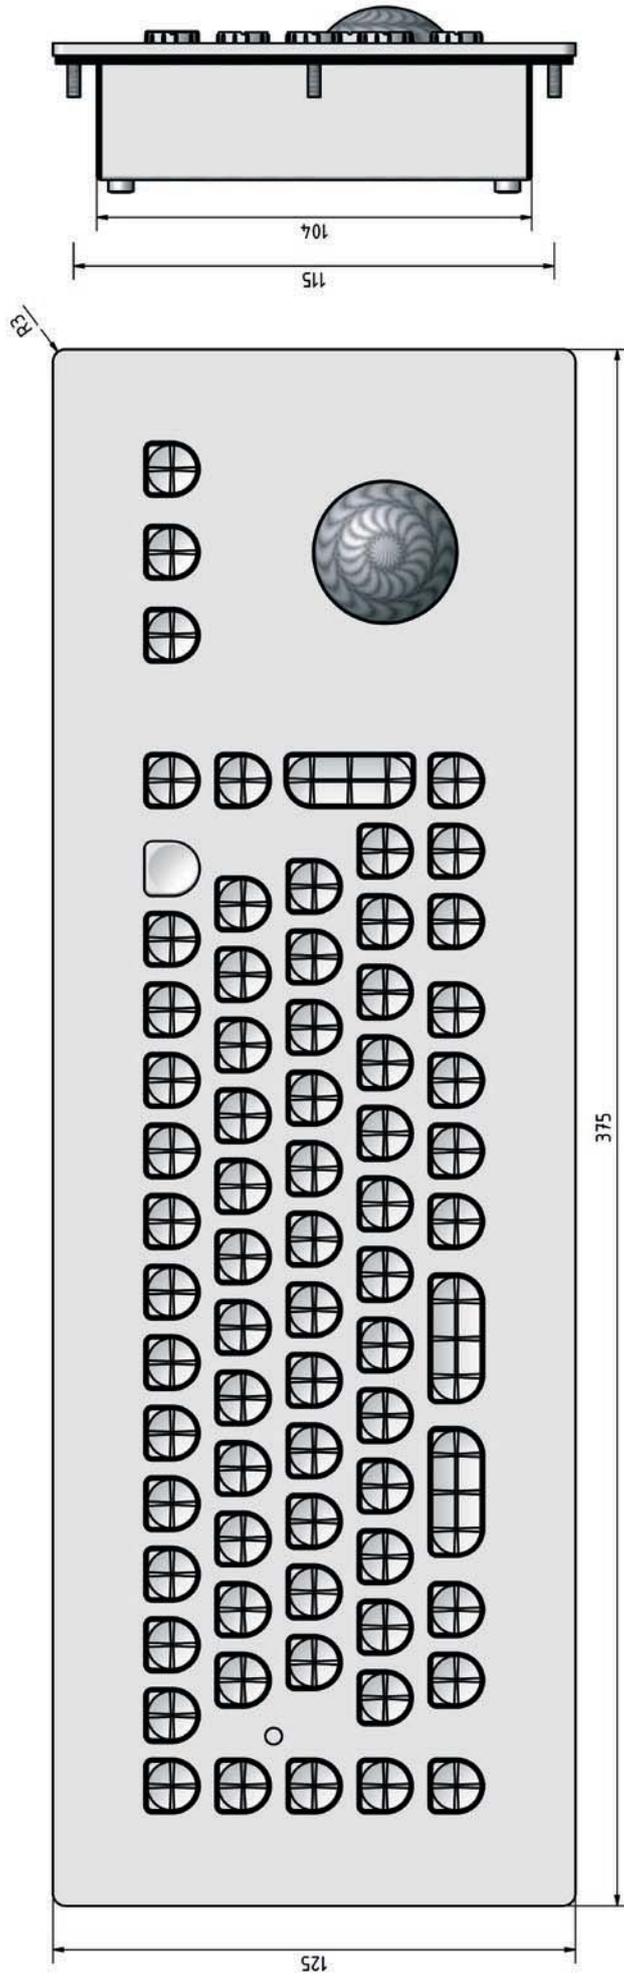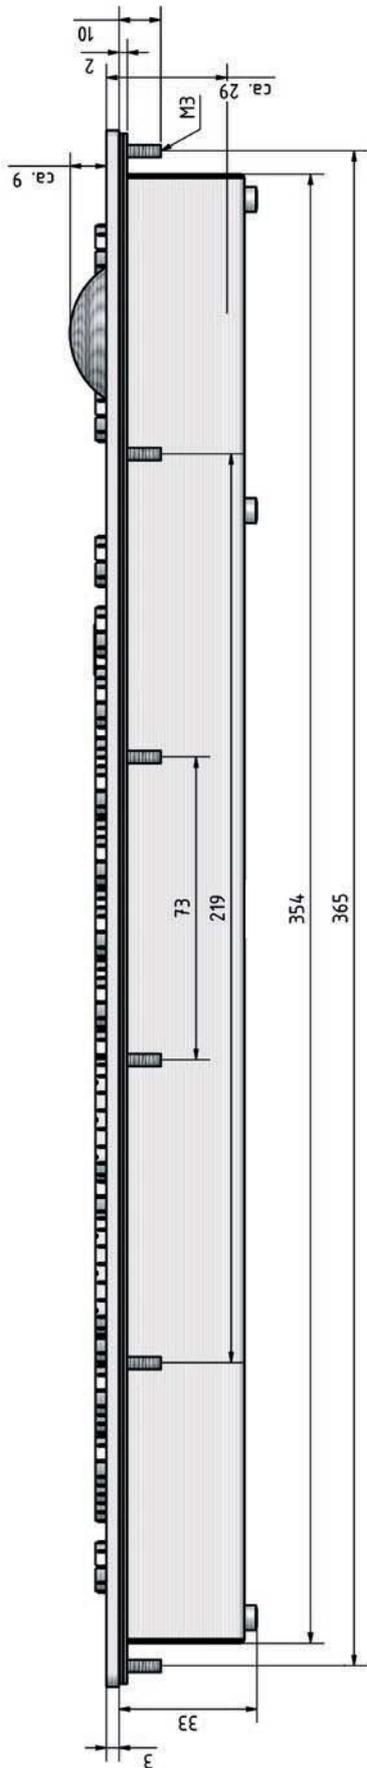

TKV-068-MODUL



Features and benefits:

- Robust and durable
- Silicone switching elements
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Actuation force 1 N / key travel 1.5 mm
- Semi or full customisation available
- Kiosk designed web- and e-mail-hot keys

Specification

Number of Keys:	68
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. Operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	300 x 125 x 26 mm; 11.81 x 4.92 x 1.02"
Weight:	1600 g
Operating Temperature:	-40 °C to 90 °C; -40 °F to +194 °F
Frontplate Material:	stainless steel

Cat.-No.	Product Name	
KV03005	TKV-068-MODUL-PS/2-US	PS/2; US-Layout
KV03007	TKV-068-MODUL-USB-US	USB; US-Layout
KY13002	TKY-068-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		



FI-Kieliversio

